


Technical Data Sheet

This document contains proprietary information and confidential. Not used for sale, marketing, purposes without written permission. if the product size and physical error. Please contact MORECONNECT



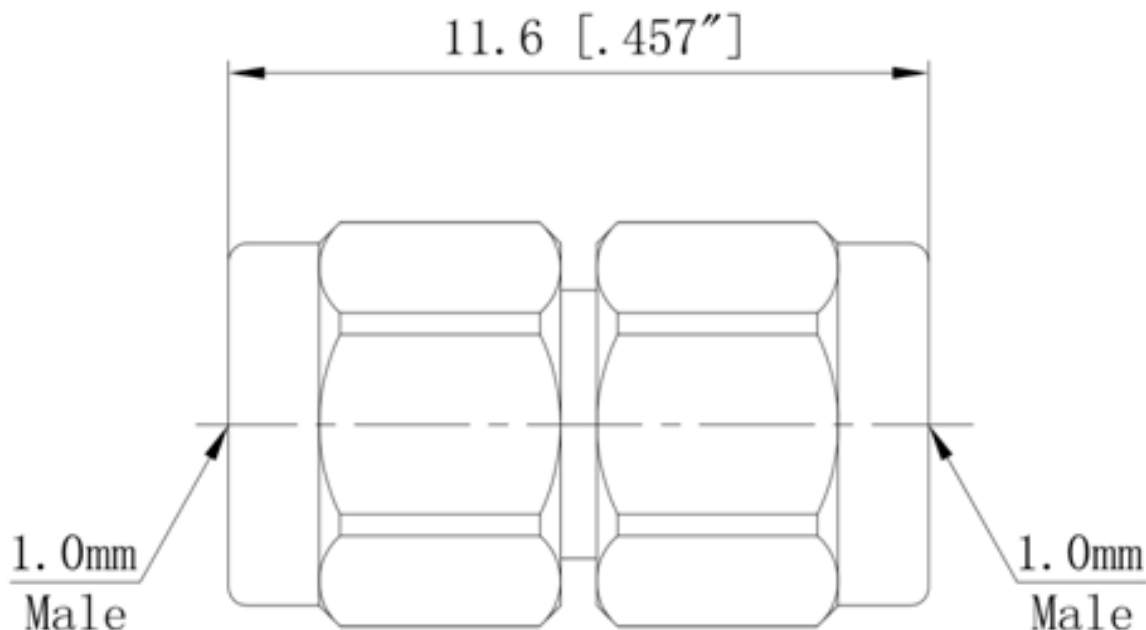

电气特性 Electrical Specifications

● 阻抗 Impedance	50Ω
● 频率范围 Frequency range	DC-110G
● 绝缘电阻 Insulation resistance	5000MΩ
● 插损 Insertion Loss	-0.3dB
● 电压驻波比 VSWR	≤1.50
● 介质耐压 Dielectric Vol.	500V

机械/环境 Mechanical/Environmental

● 绝缘介质/Insulator	聚醚酰亚胺/PEI
● 内导体 Center contact	Beryllium copper plating ternary alloy
● 主体 Body	Stainless Steel/Passivated
● 机械耐久性 Cycles	>500
● 工作温度 Operating Temp.	-55°C ~ +165°C
● RoHS	Compliant



DATE 24/5/2022	REVISIONS V524.1	DIMENSIONS IN MILLIMETERS (mm)	VIEW PROJECTION		Model No.
Designed by					1.0-JJG
Approved by		X ±0.2 X.X ±0.2 X.XX ±0.2 Angles ±1°	SIZE A4	SHEET 1/1	Title RF Coaxial connector